


## 2nd Generation Standard Slim PLC

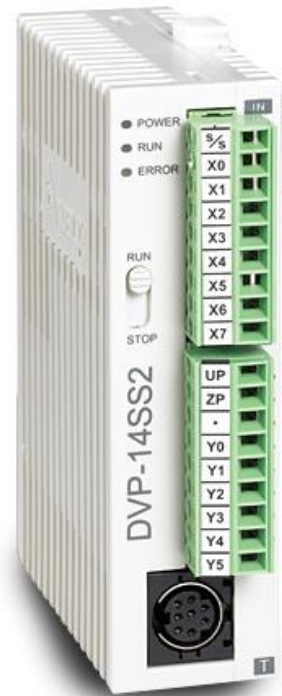

### Applications

Spinning machine, conveyer belt (rotation speed control), winding machine (tension control)

### Specifications

- MPU points: 14 (8DI + 6DO)
- Max. I/O points: 494 (14 + 480)
- Program capacity: 8k steps
- COM port: Built-in RS-232 & RS-485 ports, compatible with Modbus ASCII/RTU protocol. Can be master or slave.
- High-Speed Pulse Output: Supports 4 points (Y0 ~ Y3) of independent high-speed (max. 10kHz) pulse output
- Supports PID Auto-tuning: DVP-SS2 saves parameters automatically after the PID auto temperature tuning is completed.
- Built-in High-Speed Counters

1-phase 1		1-phase 2		2-phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
4/4	20kHz/10kHz	2	20kHz	2/2	10kHz/5kHz