


Basic Type PLC

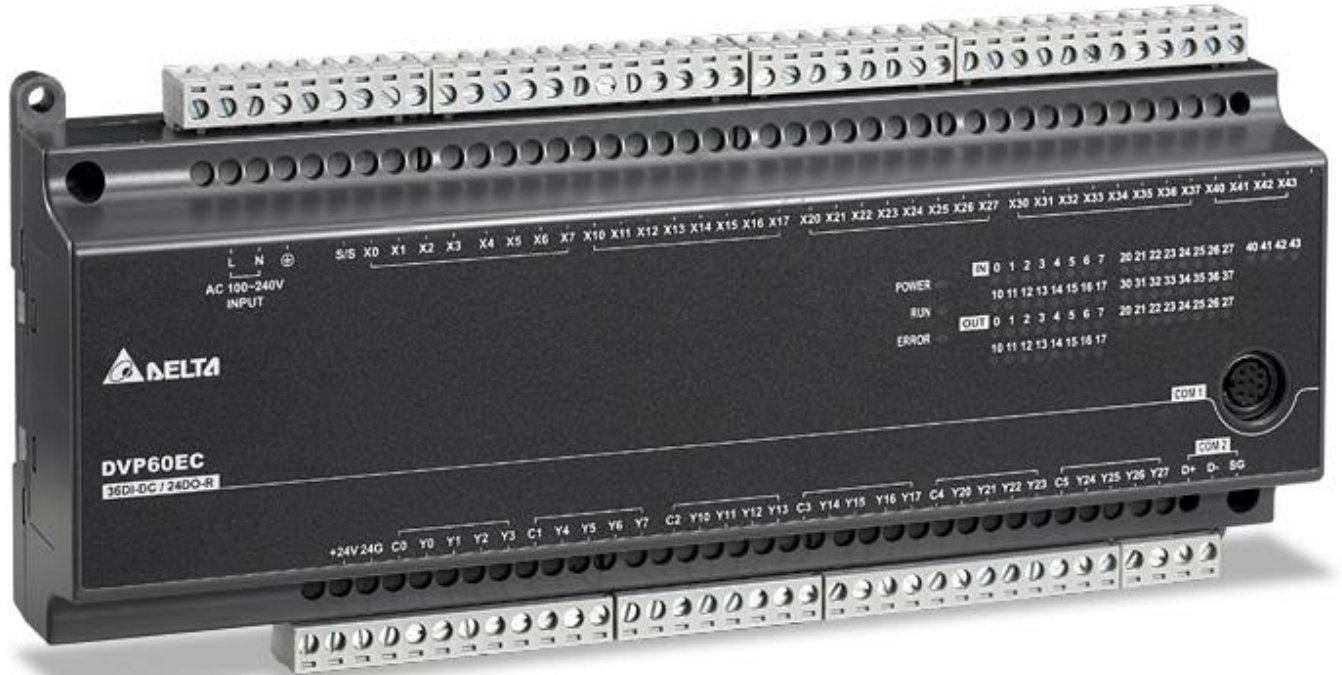

Applications

Single control unit, landscape fountain, building automation

Specifications

- MPU points: 10 / 14 / 16 / 24 / 32 / 60
- Max. I/O points: 60
- Program capacity: 4k steps
- COM ports: Built-in RS-232 and RS-485 ports (available in 16-60 point models); compatible with Modbus ASCII/RTU protocol
- Built-in 4 points of high-speed counters*:

1-phase 1		1-phase 2		2-phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/2	20kHz/10kHz	1	20kHz	1	4kHz

*Refers to the max. counting range for a single counter.